

SPECIAL PACKAGING INSTRUCTION			CODE ID	SPI NO. (TPD)
			98747	F01-340-6657
			SHEET 1 OF 3	
PART OR DRAWING NO.	NATIONAL STOCK NO.	CURRENT REV	ILL.	T. LUCERO
23831	1630-01-340-6657	A	CHK.	T. ZIMMERMAN <i>T. Zimmerman</i>
ITEM NOMENCLATURE		ORIGINAL DATE	ENGR.	M. STEPHENS <i>M. Stephens</i>
BRAKE, MULTIPLE DISK T-38		91259	AUTH.	P. FRANCIS <i>P. Francis</i>

MILITARY PRESERVATION IAW MIL-STD-2073

SERVICEABLE METHOD: 10

UNSERVICEABLE METHOD: 10

QUP 001

ICQ 000

CLEANING & DRYING: IAW MIL-STD-2073

PRESERVATIVE: N/A

MARKING IAW MIL-STD-129

SPECIAL MARKINGS:

A) SPI NO. F 01-340-6657

MARK THE SPI NUMBER ON ONE SIDE OF THE CONTAINER.

B) REUSEABLE CONTAINER DO NOT DESTROY.

CLOSURE

LEVEL A: IAW: ASTM-D6251

LEVEL B: IAW: ASTM-D1974

PACKING AS SPECIFIED BELOW AND BILL OF MATERIALS

LEVEL	SPEC	STYLE	TYPE	CL	VRTY	GR	TR
A	ASTM-D6251	A	III	2			B
B	ASTM-D5118	RSC				V3c	

LEVEL A

LEVEL B

GROSS CU FT

1.134

.666

GROSS WT LBS

56.8

47.2

DESIGN FRAGILITY G

110

110

LENGTH	WIDTH	DEPTH
12	12	8

CNTR I.D.

12

12

8

CNTR O.D.

LEVEL A:

14

14

10

LEVEL B:

12 3/8

12 3/8

8 3/4

ITEM DIM

10

10

5

ITEM WT.

45.8 LBS

REVISIONS

LTR	DESCRIPTION	DATE
A	UPDATED SPECIFICATIONS AND ADDED WOOD STATEMENT	03099

-4	A/R	TAPE	2 X 19	ASTM-D5486 TYPE V
-3	1	SLEEVE (SEE DETAIL A)	48 X 7 3/4	ASTM-D4727 TYPE CF, CL DDM, VAR SW, GR 200
-2	2	PADS (TOP & BOTTOM)	12 X 12 X 1/8	ASTM-D4727 TYPE CF, CL DDM, VAR SW, GR 200
-1	1	WRAP	40 X 20	A-A-3174 TYPE 1, CLASS 1, GRADE A, FINISH 1
P/N	QTY REQD	NOMENCLATURE DESCRIPTION	SIZE (INCHES UNLESS SPECIFIED)	MATERIAL SPECIFICATION

SPI NO. F01-340-6657

SPECIAL PACKAGING INSTRUCTION	CODE ID 98747	SPI NO. (TPD) F01-340-6657
ITEM NOMENCLATURE BRAKE, MULTIPLE DISK T-38		SHEET 2 OF 3

EUROPEAN UNION (EU) REQUIREMENTS NOTICES


NOTICE 1: LUMBER AND PACKAGING/CONTAINER STATEMENT - "ALL WOODEN LUMBER CONTAINERS PRODUCED ENTIRELY OR IN PART OF NON-MANUFACTURED SOFTWOOD SPECIES SHALL BE CONSTRUCTED FROM HEAT TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). CONSTRUCTION AND CERTIFICATION SHALL BE IN ACCORDANCE WITH NON-MANUFACTURED WOOD PACKING POLICY AND NON-MANUFACTURED WOOD PACKING ENFORCEMENT REGULATIONS, BOTH DATED MAY 30, 2001." THESE DOCUMENTS CAN BE FOUND AT WWW.APHIS.USDA.GOV.

NOTICE 2: WOODEN PALLET STATEMENT - "ALL WOODEN PALLETS PRODUCED ENTIRELY OR IN PART OF NON-MANUFACTURED SOFTWOOD SPECIES SHALL BE CONSTRUCTED FROM HEAT TREATED (HT) MATERIAL (HT TO 56 DEGREES CENTIGRADE OR 133 DEGREES FAHRENHEIT FOR 30 MINUTES). CERTIFICATION IS REQUIRED BY AN ACCREDITED AGENCY RECOGNIZED BY THE AMERICAN LUMBER STANDARDS COMMITTEE (ALSC). CONSTRUCTION AND CERTIFICATION SHALL BE IN ACCORDANCE WITH NON-MANUFACTURED WOOD PACKING POLICY AND NON-MANUFACTURED WOOD PACKING ENFORCEMENT REGULATIONS, BOTH DATED MAY 30, 2001." THESE DOCUMENTS CAN BE FOUND AT WWW.APHIS.USDA.GOV.

NOTICE 3: HARDWOOD SPECIES STATEMENT - "ALL WOODEN PALLETS PRODUCED ENTIRELY OF NON-MANUFACTURED HARDWOOD SPECIES SHALL BE IDENTIFIED BY A PERMANENT MARKING OF "NC" (NON-CONIFEROUS), 1.25 INCHES OR GREATER IN HEIGHT, ACCOMPANIED BY THE CAGE CODE OF THE CONTRACTED MANUFACTURER AND THE MONTH AND YEAR OF THE CONTRACT. ON PALLETS, THE MARKING SHALL BE APPLIED TO THE STRINGER OR BLOCK ON OPPOSITE SIDES AND ENDS OF THE PALLET AND BE CONTRASTING AND CLEARLY VISIBLE."

NOTE:

1. ITEMS PACKED IN PREVIOUS EDITIONS OF THIS SPI DO NOT NEED TO BE REPACKED.

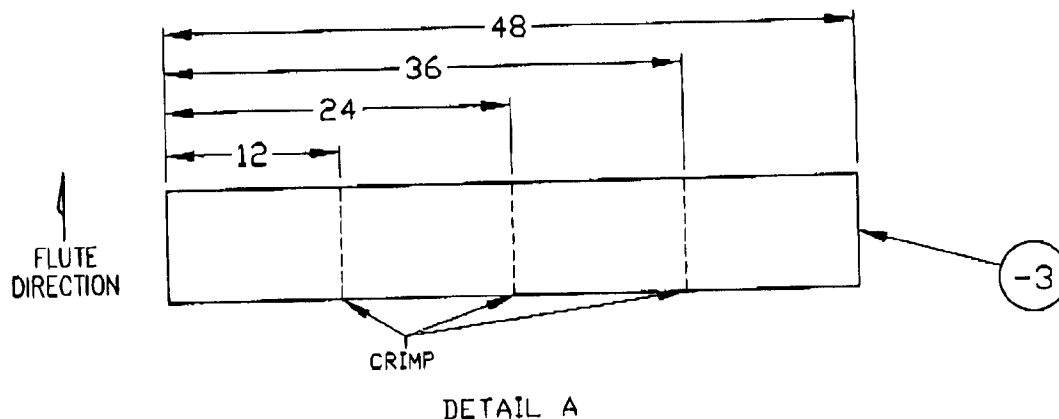

SPECIAL PACKAGING INSTRUCTION

CODE ID
98747SPI NO. (TPD)
F01-340-6657ITEM NOMENCLATURE
BRAKE, MULTIPLE DISK T-38

SHEET 3 OF 3

